


EMERALD



PORT TRAILER TYRES

FEATURES

- Range of sizes for port terminal and industrial trailer applications
- Cut-Wear Resistant Cooler tread for round the clock operations
- Resilio layers for cushion ride
- Concave sidewall profile to reduce sidewall damages
- High Durometer, Interference-fit hardbase for excellent stability and secure fitment
- 10.00 x 20 - Available in Lug and Slick (Plain) pattern
- 14.00 x 24 & 14.00 x 25 - High profile version are available

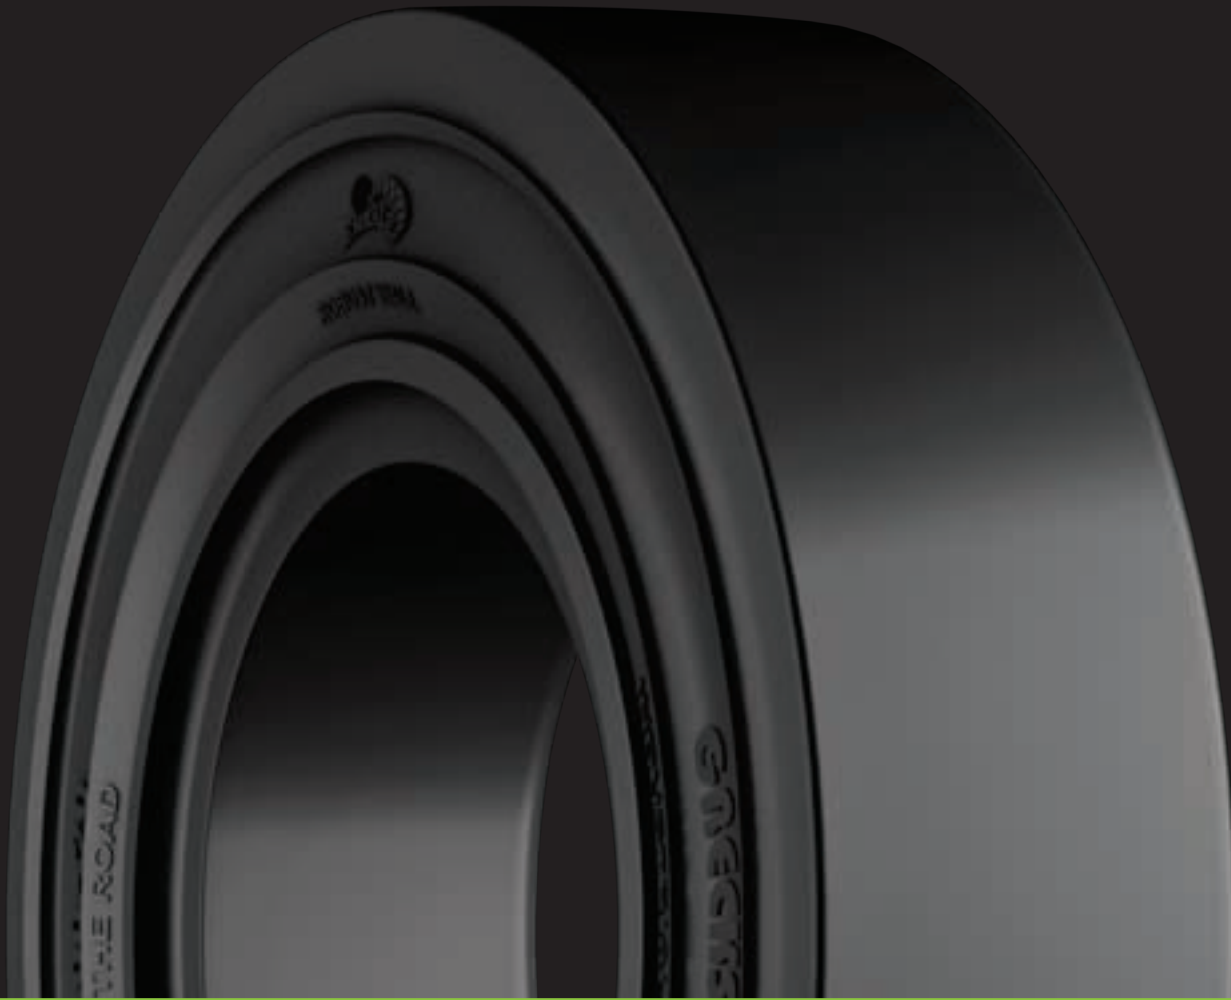

10.00 x 20

SIZE (inch)	RIM WIDTH (inch)	OD (mm)	SW (mm)	# LOAD RATING (kg)		LUG	SMOOTH
				LOAD WHEEL	STEER WHEEL		
8.25 x 20	6.50/7.00/7.50	965	225	4400	2675	●	
9.00 x 20	6.50/7.00/7.50	985	225	5340	4450	●	
10.00 x 20 - 40	6.50/7.00/7.50	1026	242	5620	4650	●	●
10.00 x 20 - 41	7.50 / 8.00	1060	280	5840	4865	●	
11.00 x 20	7.50 / 8.00	1060	280	5840	4865	●	
12.00 x 20	8.00 / 8.50	1102	295	7500	6113	●	
12.00 x 20	10.00	1102	380	7765	6470	●	
12.00 x 24	8.50	1190	288	7980	6650	●	
12.00 x 24	10.00	1190	325	9000	7500	●	
14.00 x 24	10.00	1320	332	11000	9175	●	
14.00 x 25	11.25	1345	405	12480	10400	●	

OD - Overall Diameter SW - Section or Maximum Width #LOAD CAPACITY upto 25 kmph